




POWER LOGIC®

www.KossUPS.com.my

KOSS AVR

Ativa V Series 800VA-1000VA

- Wide input voltage range for regulation
- 3 x British Sockets with Safety shuttle
- Excellent Output Voltage regulation and stability
- Internet/modem Surge Protection (RJ11)
- Built-in Thermal Protection for transformer
- Fast response for voltage fluctuation
- 2 years for full warranty against manufacturing defects

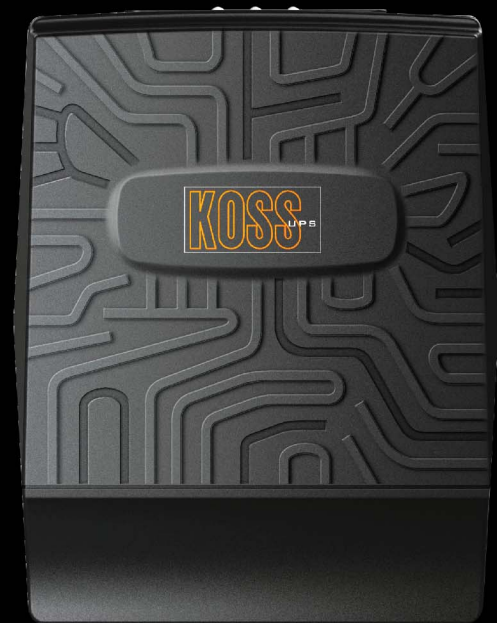

Malaysia



UK



USA



Korea



800VA & 1000VA (Top View)

Activa V Series 800VA - 1000VA

- Wide input voltage range for regulation
- 3 x British Sockets with Safety shuttle
- Excellent Output Voltage regulation and stability
- Internet/modem Surge Protection (RJ11)
- Built-in Thermal Protection for transformer
- Fast response for voltage fluctuation
- 2 years for full warranty against manufacturing defects



Technical Specification

	MODEL	Activa A-80V	Activa A-100V
INPUT	CAPACITY	800VA	1000VA
	Voltage	220/230/240 VAC	
	Voltage Range	184 - 284VAC	
	Frequency Range	50Hz	
OUTPUT	Voltage	230 VAC	
	Voltage Regulation	±10%	
	Receptacles	3 x British Sockets	
STATUS INDICATORS	Boost & Buck	Yellow lighting	
	Normal	Green lighting	
PHYSICAL	Dimension D X W X H (mm)	180 x 95 x 117	
	Net Weight (kgs)	1.25	1.5

Specification subject to change without prior notice

www.KossUPS.com.my



ISO 9001 CERTIFIED COMPANY

