


MAXTRON EPR EPRS SERIES

Rack / Tower Convertible

6kVA - 10kVA



Adjustable LCD/LED panel

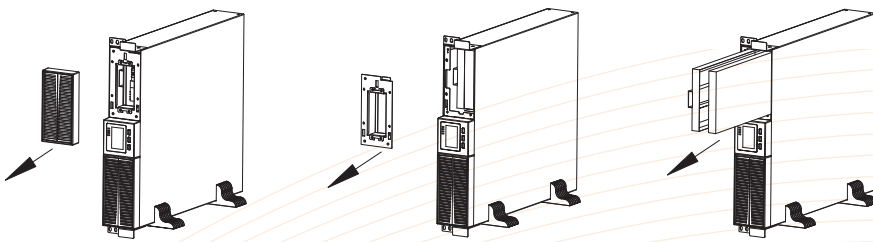

Easy for maintenance, hot-swappable battery



TRUE ONLINE RT UPS
- Single Phase

Features

- Advanced DSP and 3-level technology
- Output power factor 1.0
- Active power factor correction (APFC), Input power factor up to 0.99
- High efficiency 95% (up to 98% in ECO mode)
- Advanced digital parallel technology
- Wide input voltage range (110 ~ 288 Vac) and frequency range (40 ~ 70 Hz)
- 50/60 Hz frequency auto sensing
- Two modes of frequency conversion: 50Hz input / 60Hz output or 60Hz input / 50Hz output
- Hot-swappable battery
- Flexible battery configuration (settable 16-20 pcs batteries)
- Digitally controlled charger
- High charging current available (Max. 12A)
- Charging voltage and current configured by demands
- Linear derating in low voltage input reducing battery discharging times, extending the service life of battery
- Intelligent battery management, automatic floating / equalizing charge control, charger dormancy control, increasing battery life by 50%
- Ability to switch on the UPS with batteries
- Settable delayed start time when mains power is restored, reducing the impact on power grid or generator
- Fans speed varies intelligently with temperatures, reducing noise and extending its service life
- Equipped with self-aging function
- Compact internal layout, miniaturized the complete unit for small footprint
- LCD+LED display, multi-functional keys operation, friendly human-machine interface
- Powerful background software for parameter configuration
- Advanced multi-platform communications RS232, USB, RS485, SNMP and dry contacts communication interfaces
- Effective software and hardware protection function, robust self-diagnostic function, and abundant event log for check

Available Options

- RS232 and smart card slot included
- Optional parallel function, battery temperature compensation, SNMP card, USB, RS485 card, dry contacts, EMD and SMS alarms



TRUE ONLINE UPS


MAXTRON EPR EPRS SERIES

Rear panel

1. Intelligent Slot
2. Fans
3. Parallel Port (optional)
4. RS232
5. Emergency Power Off (EPO)
6. USB (optional)
7. Temperature Detection (optional)
8. GND
9. Bypass Breaker
10. Terminal and Cover
11. Battery Pack



6/10 kVA (S)

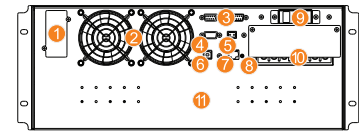

6/10 kVA

TRUE ONLINE RT UPS
- Single Phase

MODEL	MX-6000EPR / MX-6000EPRS	MX-10000EPR / MX - 10000EPRS
Capacity	6 KVA / 6KW	10 KVA / 10 KW
INPUT		
Input wiring	Single - phase three - wire (1Φ + N + PE)	
Rated voltage	208 / 220 / 230 / 240 VAC	
Voltage range	110-176 VAC (linear derating between 50 % and 100 % load) ; 176-288 VAC (no derating)	
Rated frequency	50 / 60 Hz (auto - sensing)	
Frequency range	40 ~ 70 Hz	
Power factor	≥ 0.99	
Bypass voltage range	-40 % ~ C12+ 15 % (settable)	
Total harmonic distortion (THDi)	≤ 5 %	
OUTPUT		
Output wiring	Single - phase (L - N)	
Rated voltage	208 (PF = 0.9) / 220 / 230 / 240 VAC	
Voltage regulation	± 1 %	
Frequency	Synchronized to bypass in mains mode ; 50/60 Hz ± 0.1 % Hz in battery mode	
Waveform	Sinusoidal	
Power factor	1	
Total harmonic distortion (THDV)	≤ 1 % (linear load) ; ≤ 4 % (non - linear load)	
Crest factor	3:01	
Overload	102 % ~ 110 % for 10 min , 110 % ~ 125 % for 1 min . 125 % ~ 150 % for 30 s	
BATTERIES		
DC voltage	192 VDC (192-240 VDC settable)	
Number of battery	16 pcs (16-20 settable)	
Inbuilt battery (standard model)	12V 7AH / 12V 9AH x 16	12V 9 AH x 16
Charging current	Standard model : 1 A ;/Long time model : 5 A (default) , 1 - 5 A settable ; 12 A (optional)	
Recharge time	Standard model : 90 % restored in 8 hours ; Long time model : depend on the capacity of battery	
SYSTEM		
Efficiency	≥ 94 % at 100 % load , max . 94.5 % at 60 % load , ≥ 98 % in ECO mode	
Transfer time	0 ms	
Protections	Short - circuit , overload , overtemperature, battery low voltage , overvoltage , undervoltage and fan failure	
Max . number of parallel connections	4	
Communications	RS232 (standard) , USB / RS485 / dry contacts / SNMP / battery temperature	
Display	LCD + LED	
OTHERS		
Operating temperature	0 ° C ~ 40 ° C	
Storage temperature	-25 ° C ~ 55 ° C (without battery)	
Relative humidity	0 ~ 95 % (non -condensing)	
Altitude	≤ 1000 m , derating 1 % for each additional 100 m	
IP rating	IP 20	
Noise level at 1 m	≤ 55 dB	≤ 58 dB
Dimensions (W x D x H) mm	440 x 660 x 176 (4U)	
Packaged dimensions (W x D x H) mm	554 x 792 x 418 (4U)	
Net weight (kg)	12 (S), 58	14 (S), 63
Gross weight (kg)	14 (S), 68	16 (S), 73

- S means long run model.
- * Specification contained in this document, and to prices are reserved; so are errors and omissions.
Only order confirmations and technical documentation by KOSS UPS is binding.
- Ver1. July 2023

© POWER LOGIC (M) SDN BHD. All right reserved.



POWER LOGIC

No. 2-10, Jalan Kenari 12B, Bandar Puchong Jaya, 47100 Puchong, Selangor Darul Ehsan. Tel: (603) 8070 5899

E-mail: enquiry@KossUPS.com.my